


# Angle Power Strip AP Series

Eliminate cutouts for receptacles and switches in your backsplash

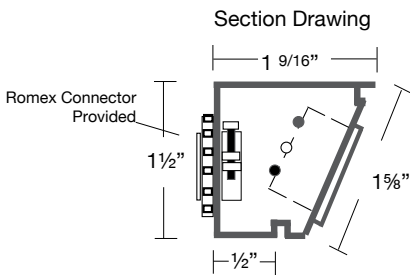

## FEATURES


- Easy Installation
- Designer finishes to blend with any decor
- 3-Year Limited Warranty

## APPLICATIONS

- Kitchens
- Baths
- Offices & Computer Labs
- Islands
- Shops & Garages

## SPECIFICATIONS

**Construction Materials:** Powder Coated Aluminum  
**Input Voltage:** 120V  
**Mounting:** Wood Screws & Mollies  
**Wiring:** 12g Romex  
**Environment:** Dry Only

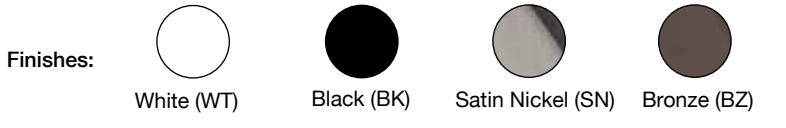

PART #	Length	# of Recept.	Recept. Color	Finish
9APS-2Color-P-Finish-*Position	9"	2	B, G, W	SN, WT, BZ, BK
12APS-2Color-P-Finish-*Position	12"	2	B, G, W	SN, WT, BZ, BK
18APS-3Color-P-Finish-*Position	18"	3	B, G, W	SN, WT, BZ, BK
24APS-4Color-P-Finish	24"	4	B, G, W	SN, WT, BZ, BK
30APS-4Color-P-Finish	30"	4	B, G, W	SN, WT, BZ, BK
36APS-4Color-P-Finish	36"	4	B, G, W	SN, WT, BZ, BK
42APS-5Color-P-Finish	42"	5	B, G, W	SN, WT, BZ, BK
48APS-5Color-P-Finish	48"	5	B, G, W	SN, WT, BZ, BK
60APS-7Color-P-Finish	60"	7	B, G, W	SN, WT, BZ, BK
72APS-8Color-P-Finish	72"	8	B, G, W	SN, WT, BZ, BK

**Example Part Number:** 9APS-2B-P-SN-L = 9" Strip, (2) Black Receptacles, Powder Coated Satin Nickel Finish, Left Side Wire Entry

## INSTALLATION COMPONENTS


TR-SQ-JB-Finish	3" x 3" x 2 1/8" Square Junction Box
TRC9-1SPS-Color-Finish	9" TR Series APS with single pole switch offset to right
TRC9-4PORT-Color-Finish	9" TR Series APS with 4-port data insert
TRC9-BLANK-Color-Finish	9" TR Series APS blank junction box




# AP SERIES

## Standard Sizes & Configurations


72APS-8Color-Finish




60APS-7Color-Finish




48APS-5Color-Finish




42APS-5Color-Finish




36APS-4Color-Finish




30APS-4Color-Finish




24APS-4Color-Finish





18APS-3Color-Finish (choose left or right wire entry)



12APS-2Color-Finish (choose left or right wire entry)



9APS-2Color-Finish (choose left or right wire entry)



9" APS, right side wire entry, brushed nickel, grey receptacles

### Custom Options

- Custom sizes from 9" to 144"
- 120 Volt integral switch (available in black or white only)
- Additional receptacles
- Custom receptacle/switch placement

#### NOTE:




- Receptacles must be a minimum of 2" apart (on center)
- Custom charges will apply. Call for a quote and assistance with your custom order.
- Call for lead time

# AP SERIES

## Installation Instructions

### General Guidelines

- Power source **MUST** be a 20 amp branch circuit protected by a GFCI at the panel or GFCI prior to the connection at APS
- All wiring must meet NEC and local codes. The Angle Power Strip (APS) must be installed by a licensed electrician..
- Use knockout holes for 120v wire entrance. Use listed Romex connectors provided for 120v electrical connections.
- Use tool provided to pry open for wiring. (Using other devices may damage the aluminum cover.)
- Field cutting voids warranty.

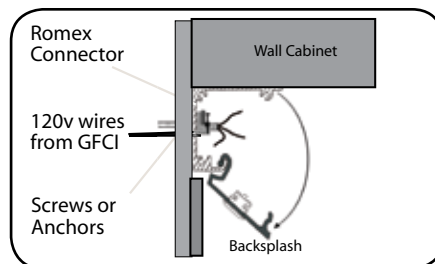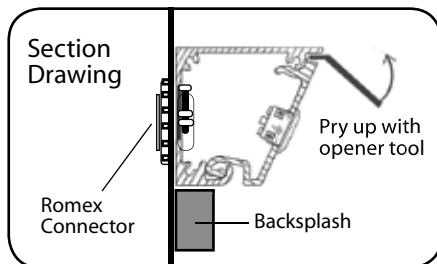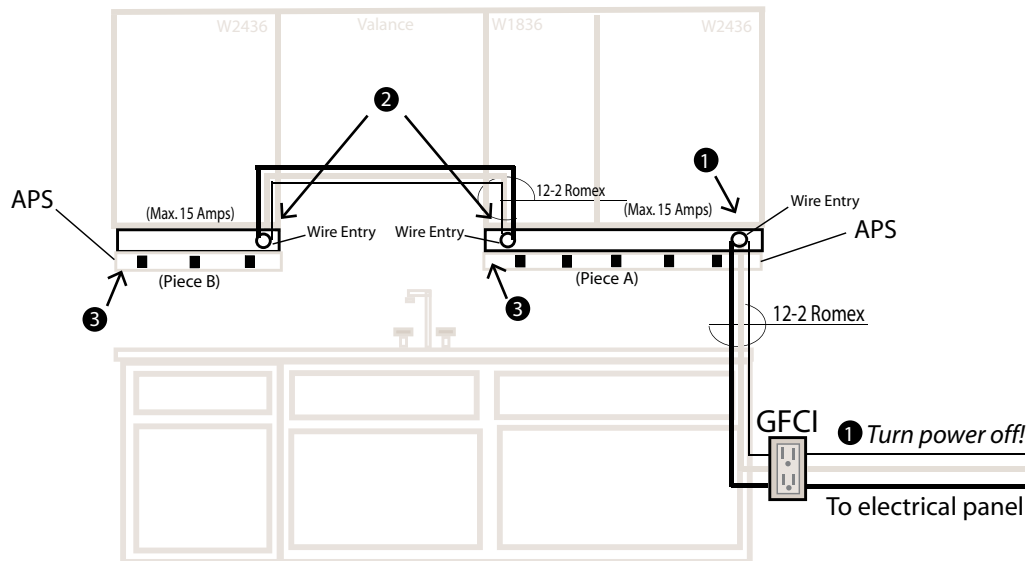

1 Turn power off at panel. Pry open each piece with tool (provided). Insert Romex connector into hole with locknut on back frame. Pull wires into APS.

2 Secure APS to wall with screws into studs or use anchors provided. Strip wires and connect black to black, white to white. Ground all green wires to grounding stud on inside back of frame. When connecting two APS, run Romex from fixture to fixture. Ground each section to the next.

3 To terminate last APS, use wire nuts on ends of wires. Snap cover in place and turn power on.

