




OUTWATER PLASTICS INDUSTRIES, INC.


24 River Road, P.O. Box 500, Bogota, NJ 07603-0500

Phone: 1-800-631-8375 • Fax: 1-800-888-3315 • www.outwater.com

Installation Instructions PDS-CA-420-BK

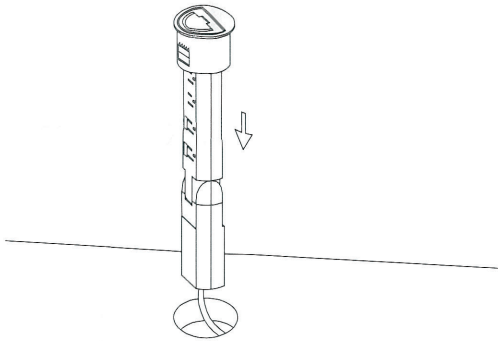


Step 1
Place Outlet Into 50mm hole.

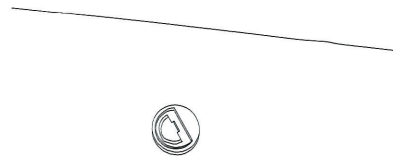


Step 2
Lower the Outlet when not in use.

Step 3
Use the Pull Ring to lift the Outlet.

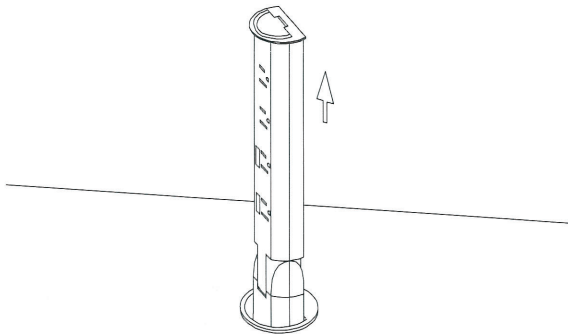

Step 4
Fold the Outlet over before using.

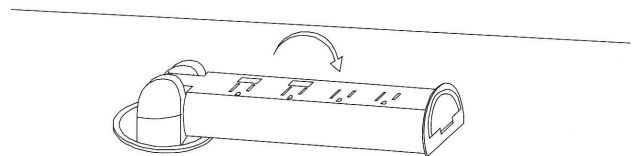

SPECIFICATIONS

UL/cUL Listed

Requires 60mm hole for table top's grommet

Four AC Outlets

Two USB ports

AC Cord: 10' long, 14 AWGx3-wire

NEMA-15P plug-3 prong

15 Amp sliding switch/reset breaker

Red LED surge indicator

Electrical rating: 12 A, 125V, 50/60Hz

Voltage Protection Rating: L-N 400V, L-G 500V, N-G 500V

Surge Joule Rating: 2,100 Joules

Max Spike Current: 75,000A

EMI/RFI Noise Filtration: 150kHz-100MHz up to 37dB reduction

USB Output: 5V/2.1A max total